



## MICRO DRACO QUAD RAIL INSTALLATION INSTRUCTIONS

Step 1 Disassemble firearm: remove dust cover, recoil spring, bolt carrier with the bolt.



Step 2 Remove factory wood. For new 2015 Micro Draco you will need to retain the bolt from the wood furniture. (see page 2 for instructions)



Step 3 pre-install upper and lower parts of quad rail on the micro Draco.



Step 4 Align the top part of the rail on the rear sight tower of the gun. Center mark to drill the whole.



Step 5 Drill the whole on the top part of the rear block with #29 drill bit (not included).



Step 6 Thread the drilled whole with 8-32NC tap (not included).


Step 7 Preinstall lower and upper parts of the quad rail. **DO NOT THIGHTEN 2 RAIL'S SCREWS** (included)



Step 8 After installation of the 8-32 screw make sure that it does not sit too low to interfere with bolt carrier. Using red lock tight (not included) lock supplied 8-32 screw on the previously threaded whole.



Step 9 Using blue Lock tight (not included) tighten 2 screws supplied with quad rail. **DO NOT OVER TIGHTEN SCREWS AS THIS WILL CAUSE THE RAIL TO BE UNLEVEL.**

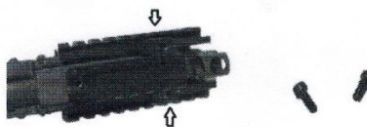

Step 10 Reassemble Micro Draco



If you have new 2015 Micro Draco there is an extra step to install the rail

Retain the bolt from the wood furniture, measure and cut from the top of the bolt

To 17.5mm you will need this bolt to use as a leveler for the bottom rail. Use blue lock-tight on all screws and bolts.