

## MICRO DRACO QUAD RAIL INSTALLATION INSTRUCTIONS


Step 1 Disassemble firearm: remove dust cover, recoil spring, bolt carrier with the bolt.



Step 2 Remove screw from factory wood. Remove factory wood hand-guard. Replace factory screw with provided spacer.



Step 3 per-install upper and lower parts of quad rail on the micro Draco.



Step 4 Align the top part of the rail on the rear sight tower of the gun. Center mark to drill the whole.



Step 5 Drill the whole on the top part of the rear block with #29 drill bit (not included).



Step 6 Thread the drilled whole with 8-32NC tap (not included).


Step 7 Pre-install lower and upper parts of the quad rail. **DO NOT TIGHTEN 2 RAIL'S SCREWS** (included)



Step 8 After installation of the 8-32 screw make sure that it does not sit too low to interfere with bolt carrier. Using red lock tight (not included) lock supplied 8-32 screw on the previously threaded whole.



Step 9 Using blue Lock tight (not included) tighten 2 screws supplied with quad rail. **DO NOT OVER TIGHTEN SCREWS AS THIS WILL CAUSE THE RAIL TO BE UNLEVEL.**

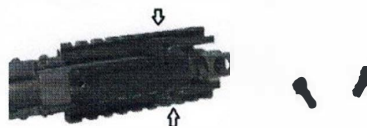

Step 10 Reassemble Micro Draco

